

WV400

the COUPLER to rely on

WOODFIELD

Safe Hands

PERFORMANCE
RELIABILITY



part of the **WOODFIELD**
APILOAD product range

Designed and manufactured by Woodfield Systems International


WV400

the COUPLER to rely on

WOODFIELD

Safe Hands

"The **WV400 API** Coupler has been developed with decades of bottom loading experience from applications around the world. The rugged design and ease of maintenance features will provide years of solid performance and reliability, the **WV400** is the coupler to rely on"

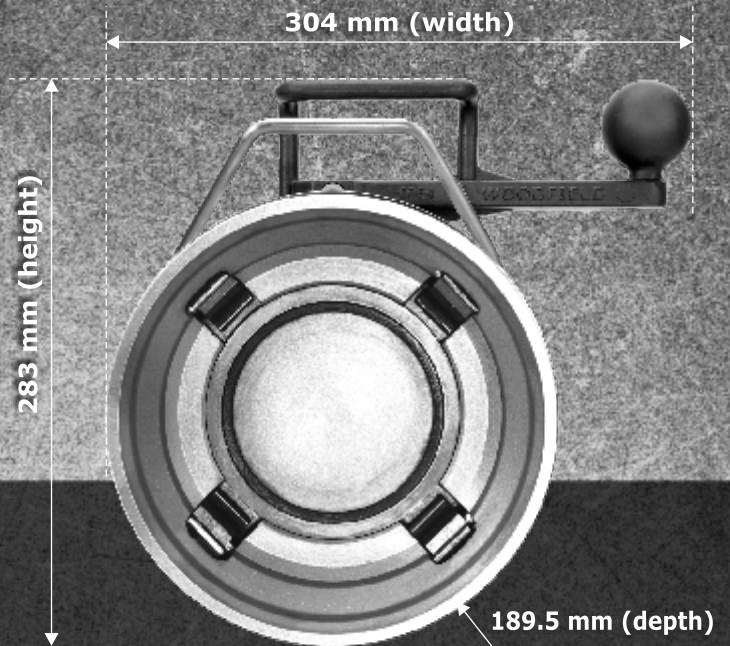

4 Lug Design

Snap on functionality with unique stainless steel 4 lug design

Stainless Steel Outer Sleeve

SS outer sleeve for long life durability

Hard Anodized Body

Aluminum hard anodized body (A356-T6)

Easy Strip Serviceability

The infield removable handle and poppet will get you back to work quicker with minimal down time when nose seal replacement is required

- Working pressure: Up to 10 bar (145 psi)
- Max surge pressure: Up to 34 bar (493 psi)
- Test pressure: 15 bar (217 psi)
- Max recommended flow inline with RP API 1004 8th edition
- Operating temperature range (seal specific) -40°C to +100°C (-40°F to +212°F)
- Weight 18.7 lbs (8.5 kg)
- 4" TTMA flange

THE FIGURES

Model Number	Seals	Temperature Range
WV 400 VB	Viton B	-15°C to +90°C (+5°F to +194°F)
WV 400 VT	Viton GFLT	-40°C to +100°C (-40°F to +212°F)
WV 400 NL	Nitrile	-30°C to +100°C (-22°F to +212°F)

Woodfield Systems USA Inc

200 Business Park Boulevard, Columbia, South Carolina 29203. USA.
US/Canada Toll Free :+1 888 915 6266
International :+1 803 399 7597
Email: sales.usa@woodfieldsystems.com

Woodfield Systems International

302 -A, Nitco Biz Park, Wagle Estate, Thane (W) - 400604, Maharashtra, India.
Phone: +91-22-6704 0000
Fax: +91-22-6704 0099
Email: sales@woodfieldsystems.com

Woodfield Systems Europe

Avda, San Francisco Javier, 9 Off. 1129, 41018 Sevilla, Spain
Email: sales.es@woodfieldsystems.com